



## 4-182.07DST DST Hinge Pr05 180°



### Advantages

- For surface mounted doors for adjacent cabinets.
- Hinge partly visible.
- Door bending 25mm.
- RH/ LH application.
- Opening angle 180°.
- Tool-less installation of door-part.
- Door-part with pre-fitted and captive pin-halves.
- At about 30° door opening the door can be pulled out, after retracting the pin-halves.
- For door installation, the door is inserted into the frame at approx. 30° and the hinge pins are pressed in.

### Materials

- **Frame- and door-part and pin:** zinc die, black
- **Snap wedges:** sintered metal, coated
- **Detent spring:** spring steel

### Remarks

Possible notching in the door for a gap of 2mm between door and frame.  
Frame holes layout is also suitable for mounting dual hooks as on product system 3-170 or 3-910 shown allowing reversibility of door.  
Fastening can be done with low hexagon nuts M6 DIN EN ISO 4035.



## Hinge

Part Number	Clamping range (S)	Installation type
412-9006.00-00015	1.2 - 1.7 mm	tool-less / screw-on
412-9006.00-00020	1.7 - 2.2 mm	tool-less / screw-on
412-9006.00-00025	2.2 - 2.7 mm	tool-less / screw-on
412-9006.00-00030	2.7 - 3.2 mm	tool-less / screw-on
412-9006.00-00035	3.2 - 3.7 mm	tool-less / screw-on




# Accessories

292-0701.15-01530 Reinforcement plate for cutout

292-0402.00-03014 Cutout-cover

292-0301.15-00000 Tool for uninstallation

292-0306.80-02530 Tool for uninstallation

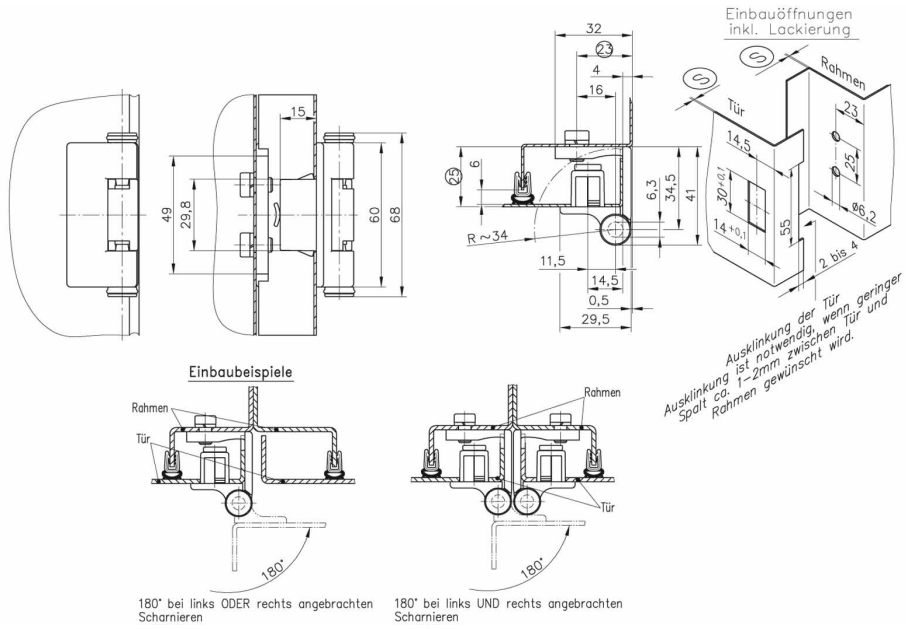

180° bei links ODER rechts angebrachten Scharnieren

180° bei links UND rechts angebrachten Scharnieren